

Ce plan est la propriété exclusive de la société NICOMATIC. Il ne peut être reproduit sans son autorisation. Loi du 11.03.1902.  
 This document and drawings, sketches, and schematic drawings are the property of the NICOMATIC company.  
 and no parts thereof may be reproduced and used without the written consent of the owner. Law dated 11.03.1902




	0.50 mm	1.00 mm	1.25 mm	1.27 mm	2.54 mm	Tolerance on cable with pitch	
						>0.50 mm	0.50mm
Pitch	0.50 mm	1.00 mm	1.25 mm	1.27 mm	2.54 mm	±0.15 mm	±0.10 mm
Cable width	(N+1) 0.50	(N+1)	(N+1) 1.25	(N+1) 1.27	(N+1) 2.54	±0.15 mm	±0.10 mm
Cable thickness	0.22	0.25	0.25	0.25	0.25	±0.05 mm	
Conductor width	0.28	0.66	0.80	0.80	1.57	±0.05 mm	
Conductor thickness	0.035	0.076	0.076	0.076	0.076	±0.025 mm	
Exposed length	4	5 (4 for P8) (5 and 4 for PA)	5 (4 for P8) (5 and 4 for PA)	5 (4 for P8) (5 and 4 for PA)	5 (4 for P8) (5 and 4 for PA)	±1.00 mm	
Stiffener length	6 (2 for P8) (10 and 2 for PA)	10 (2 for P8) (10 and 2 for PA)	10 (2 for P8) (10 and 2 for PA)	10 (2 for P8) (10 and 2 for PA)	10 (2 for P8) (10 and 2 for PA)	±1.50 mm	
Mating thickness (P3, P5)	0.30	0.30	0.30	0.30	0.30	±0.05 mm	
Margin	0.36	0.66	0.85	0.86	1.68	±0.15 mm	±0.10 mm

Conductor size	Pitch
A - 0.076 mm x 1.57 mm	2.54
C - 0.076 mm x 0.80 mm	1.25 / 1.27
D - 0.076 mm x 0.66 mm	1.00
K - 0.035 mm x 0.28 mm	0.50


Tolerance on length	
0-150 mm	±1.50 mm
151-300 mm	±1.75 mm
301-450 mm	±2.50 mm
451-600 mm	±3.00 mm
601-900 mm	±4.00 mm
Over 900 mm	±1% of length

	Pitch	
	0.50mm and 1.00mm	1.25mm, 1.27mm and 2.54mm
Conductor	Tin plated copper	Tin plated copper
Insulation	Polyester	Polyester
Voltage	90 V	300 V
Temperature	-55° C to 105° C	-55° C to 105° C
UL flame rating	VW-1	VW-1
Dielectric strength	5.000 V	5.000 V
Insulation resistance	5.000 Mega Ohms	5.000 Mega Ohms


**PA type :**

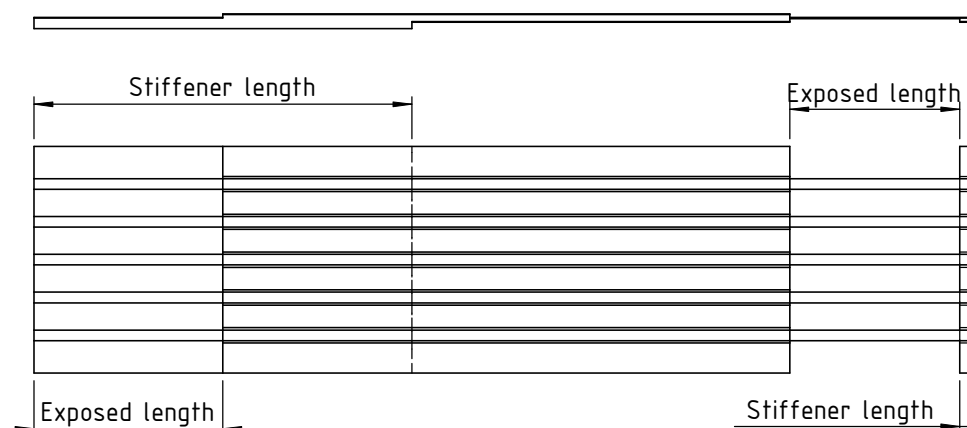


**P5 type :**

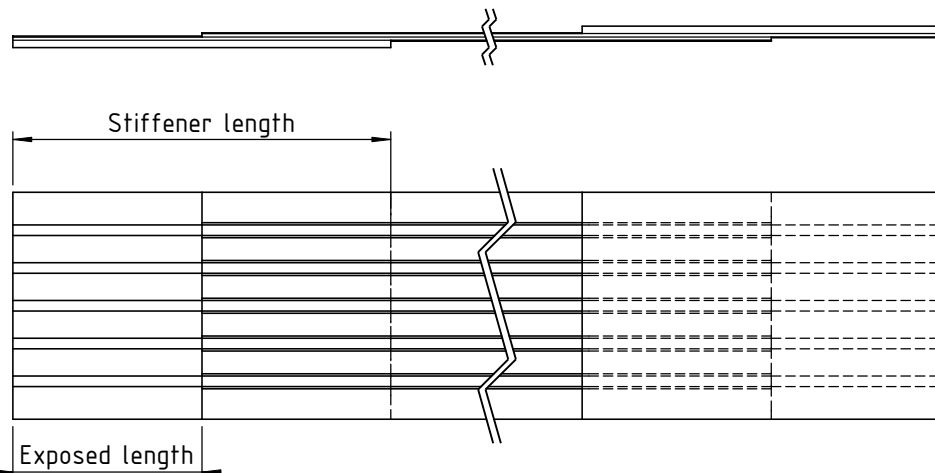


**P8 type :**

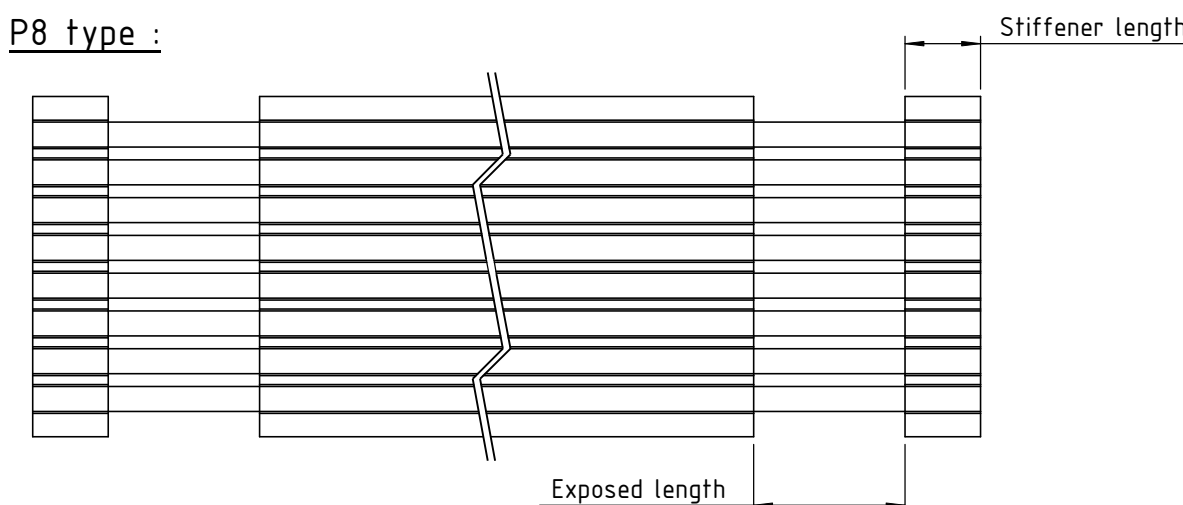


**P3 type :**

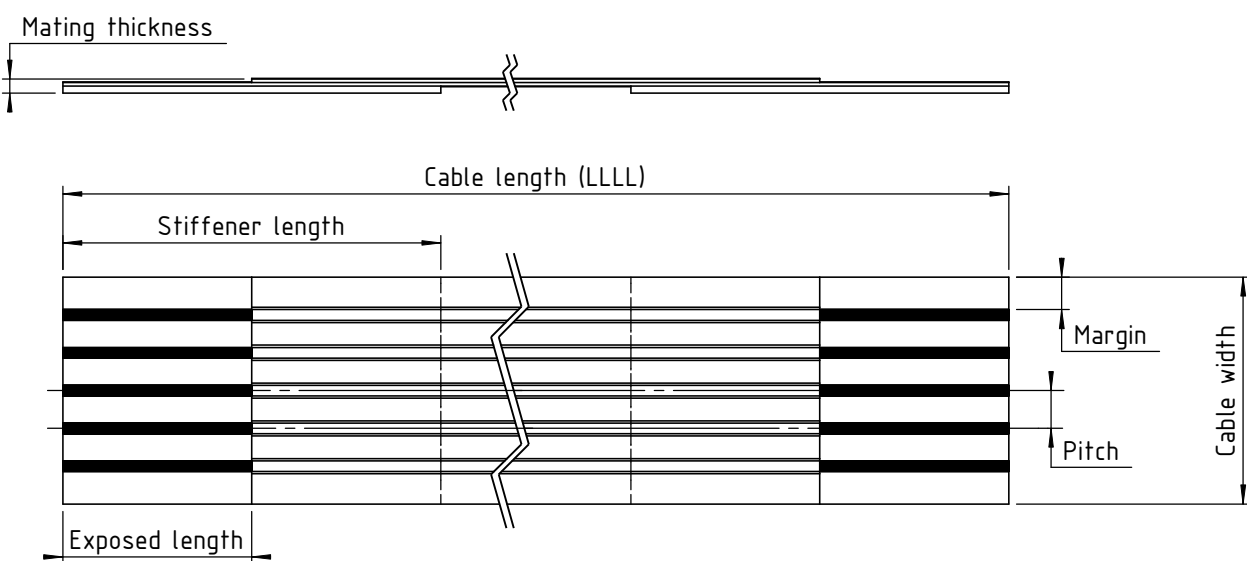

**P7 type :**

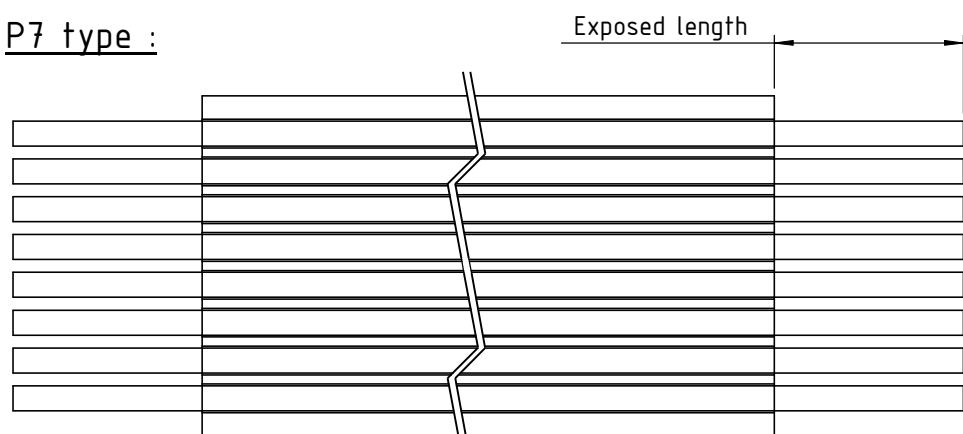

**Codification :**

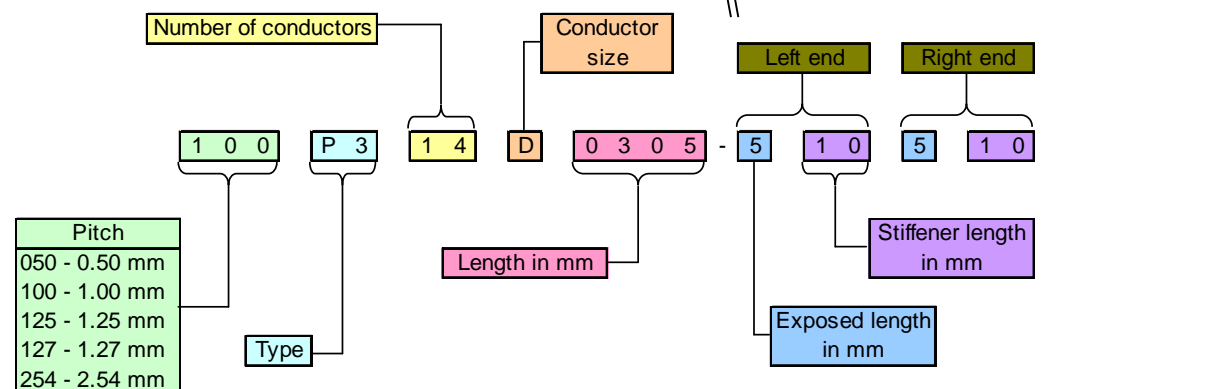

		22/21/10/11	C.G.	-	E.M.
	173, rue des fougères Z.I. Les Bracots F-74890 Bons-en-Chablais Tel. : +33 (0)4.50.36.13.85 Fax : +33 (0)4.50.36.11.33 Web : www.nicomatic.com	Echelle/Scale <b>5:1</b>	Iss Date 22/21/10/11	Drawn C.G.	Checked -
Désignation : <b>Câble plats FFC card</b>		Designation : <b>FFC card cable</b>			
Répertoire / Folder : \FFC Card Cable_ct		Tolérance générale / General tolerance		See notes	
Réf. catalogue / Catalogue Reference <b>FFC Card Cable</b>		Page 1/1		A3	